Enclosures

DESCRIPTION: PREMIUM WEATHER PROOF ENCLOSURE

Material Specifications

Material: Shock resist technopolymer on ABS base.

Door Material: Polycarbonate

Din-rail: Zin plated Steel

Resistance to heat: Glow Wire to 650 °C

Application Temperature: -5 °C to +60 °C

IP Rating: IP65




Dimensions

PART No.	Height (mm)	Depth (mm)	Width (mm)
EC62004	174	103	154
EC62008	185	103	205
EC62012	228	103	285
EC62024	397	132	300
EC62036	416	132	400

Issue Date: 9/12/21 Revision Date: 9/12/21 Authorised by: PV Connections

Enclosures

DESCRIPTION: PREMIUM WEATHER PROOF ENCLOSURE

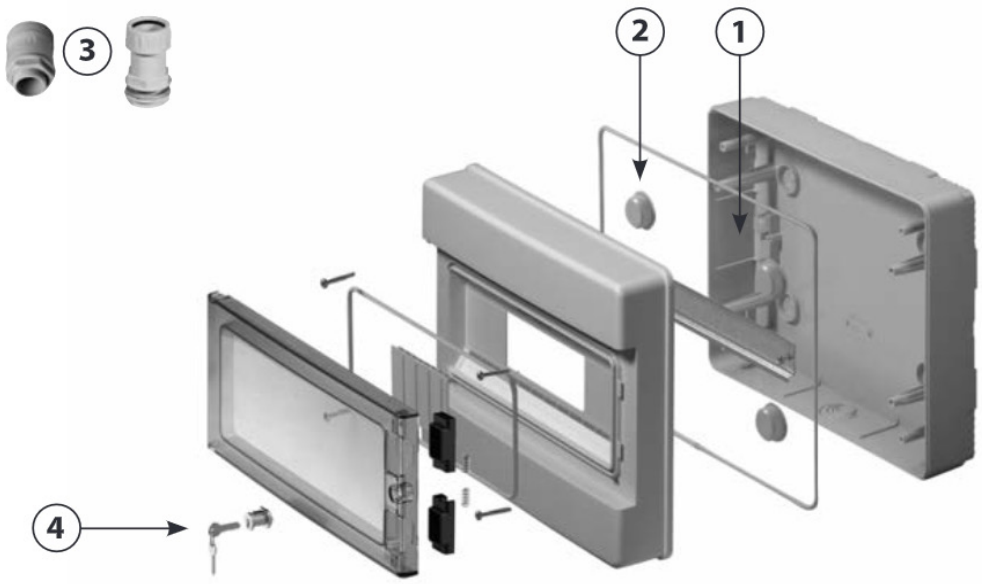


Installation Instructions

1. Possibility to install equipments with a depth of 48 or 75 mm
2. Blank cover for empty modules and plastic cups for the holes of the fixing screws in the back to gain double insulation
3. Watertight conduit-box fitting joint e@sysystem or BS Series (not provided)
4. Barrel Security lock (not provided)

Issue Date: 9/12/21 Revision Date: 9/12/21 Authorised by: PV Connections


Enclosures

DESCRIPTION: PREMIUM WEATHER PROOF ENCLOSURE

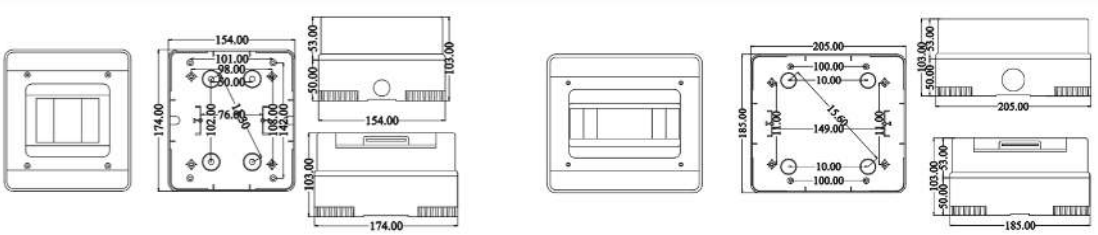


EC62004


EC62008

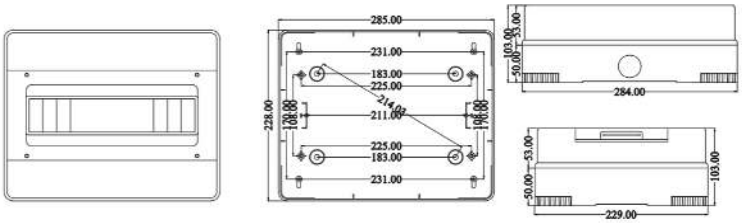

EC62012

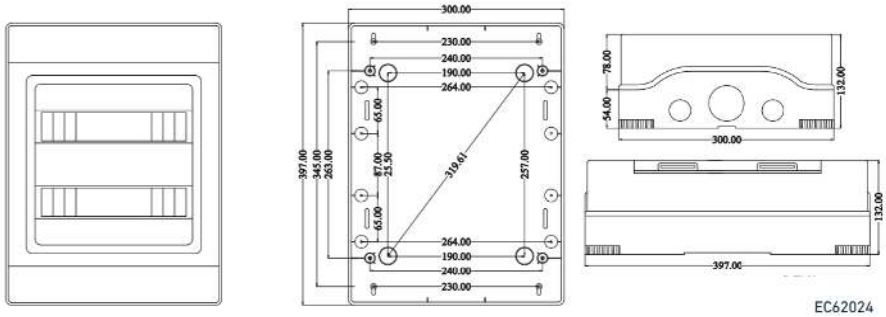

EC62024

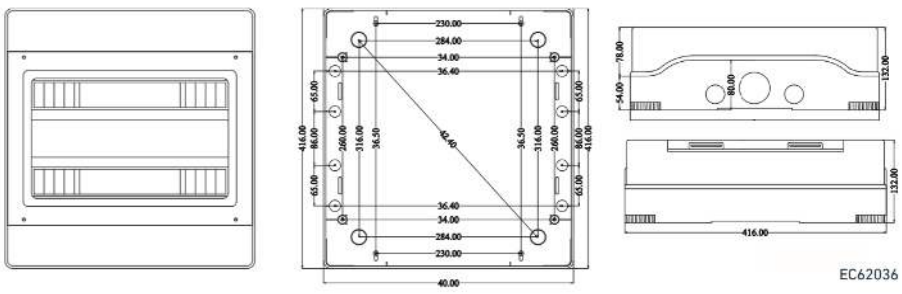

EC62036

Issue Date: 9/12/21 Revision Date: 9/12/21 Authorised by: PV Connections